Shinland

Each Ray is brighter in Shinland

SL-044B

Details

Botano	LED Source	
Material:	URC2500	
Cover Material:	PC	
Process:	Vaccum Aluminum Plating PC	CLL02x
MAX Diameter:	44.0mm	
Height:	20.2mm	MINI
Matched Holder:	SL-HD-A	
Matched Cover:	SL-044-CLEAR-LENS/SL-044-MIXING-LENS	CXM-9
ROSH Compliant:	YES	CHM-9
Status:	Ready	
		CXA15

Optical Properties

			E8
Code	Typ. FWHM	Typ. Eff	
SL-04415B	15°	93%	Soleriq S8 Soleriq S9
SL-04425B	25°	93%	Soleriq S10
SL-04438B	38°	93%	5258
SL-04460B	60°	93%	105 1202/1203
			1202/1203

Photo



C5 G16 G18	
LC020C LC006B	
EDC-38C	

G4-10

Matched


V10


NFCxL036B




Dimensional Figure SL-044B

Measure Unit: mm

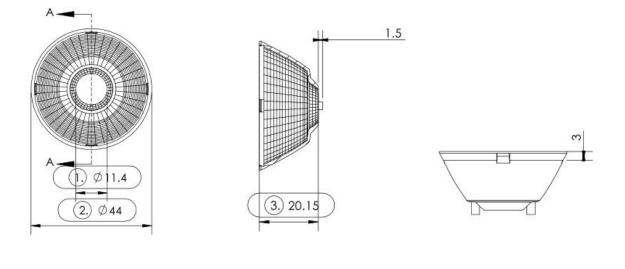








Shinland

Dimensional Figure SL-CXM-9-HD-A

Measure Unit: mm

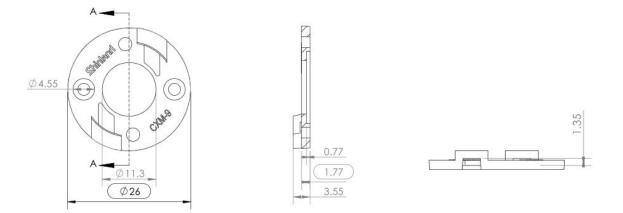







Shinland

Dimensional Figure SL-G4-10-HD-A

Measure Unit: mm

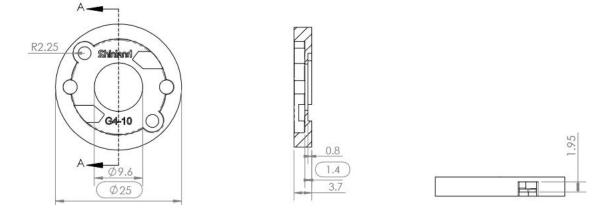









Distribution Curve Flux SL-044B&SL-CXM-9-HD-A

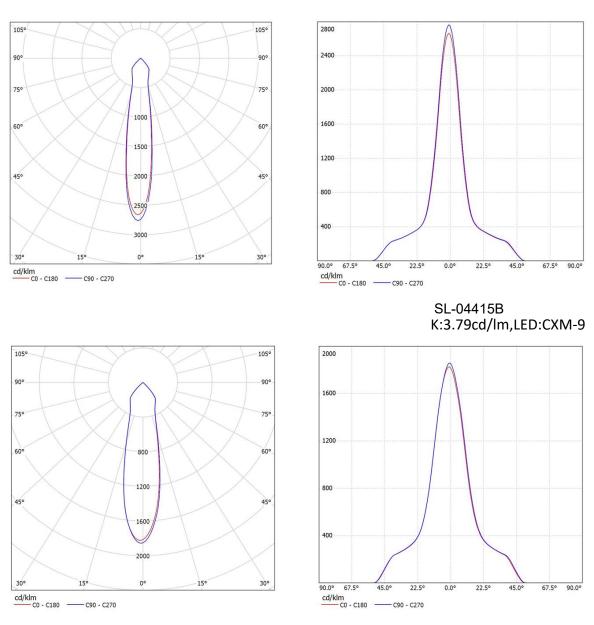

SL-04425B K:2.53cd/lm,LED:CXM-9

Distribution Curve Flux

SL-044B&SL-CXM-9-HD-A

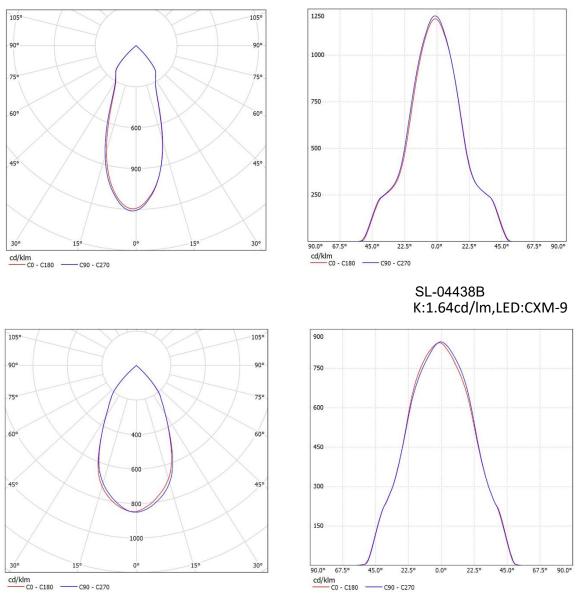


SL-04460B K:1.14cd/lm,LED:CXM-9




Distribution Curve Flux

SL-044B&SL-G4-10-HD-A

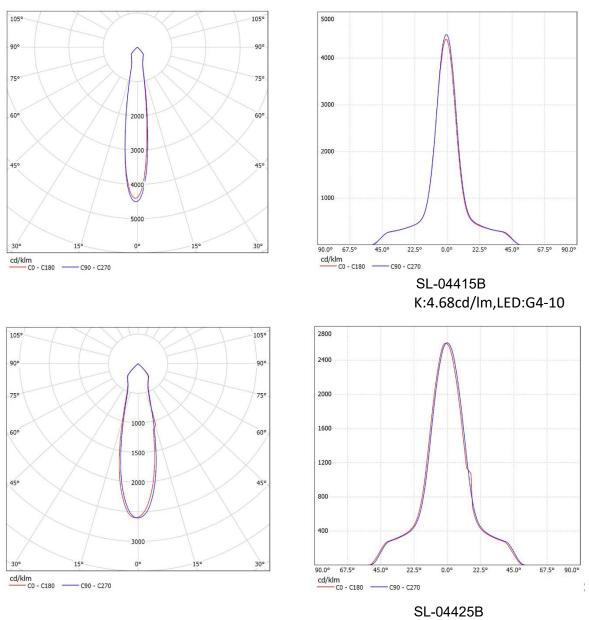


K:2.69cd/lm,LED:G4-10

Distribution Curve Flux SL-044B&SL-G4-10-HD-A

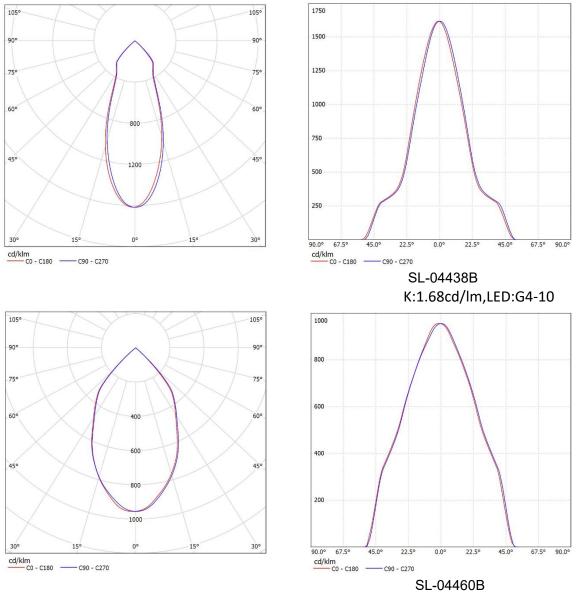


K:0.99cd/lm,LED:G4-10

Distribution Curve Flux SL-044B&SL-CLL020-HD-A

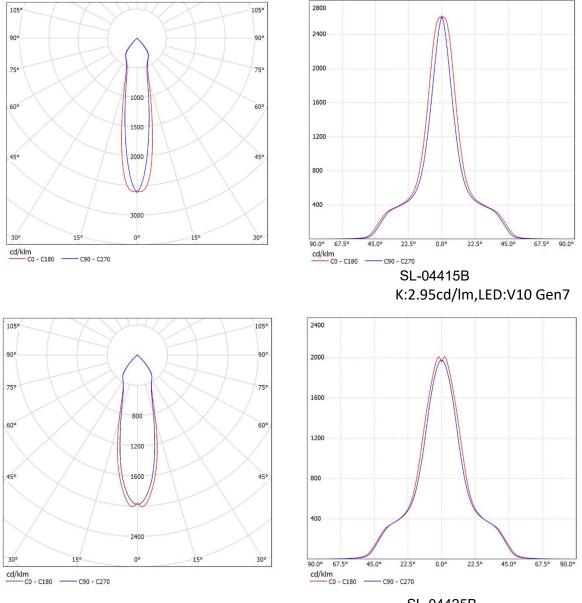

SL-04425B K:2.25cd/lm,LED:V10 Gen7

Distribution Curve Flux SL-044B&SL-CLL020-HD-A

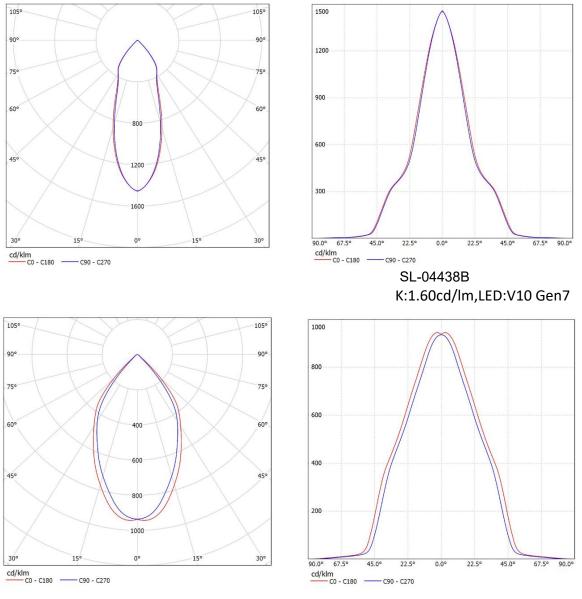

SL-04460B K:1.05cd/Im,LED:V10 Gen7

Package Description

SL-044B

PART N0.	WITHOUT PC COVER		WITH PC COVER		BOX SIZE
	Number Per Box (pcs)	Box Weigh (kg)	Number Per Box (pcs)	Box Weigh (kg)	(cm)
SL-04415B	750	4. 20	700	5.35	55 X 32 X 32
SL-04425B	750	4.18	700	5.35	55 X 32 X 32
SL-04438B	750	4. 30	700	5.40	55 X 32 X 32
SL-04460B	750	4.25	700	5.20	55 X 32 X 32

Shinland

Notes

- It is not allowed to scrub the reflective surface. If there is dust on the surface, please clean by soft cotton with little water.
- It is forbidden to clean with industrial solvent such as ethanol.
- Storage temperature: 0°C-40°C, and humidity:30%-95%
- Keep reflectors in package to void the dust.
- Prohibit the reflector touch with acid or alkaline solvent

About Shinland

Shenzhen Shinland Co. Ltd,one of the longest and most professional company in lighting optical field,have 20 years experience.Different from other factory which only have simple process, all aspects included R&D,making mold,injection molding ,vacuum coating and market support are our company own vertically integrated production .

Insisting on 'Quality First, Service First' and pragmatic, enterprising spirit,building the market by quality, casting our brand by credibility and integrity ,Shinland now become the leading supplier of lighting optical solution in China.

