

The background is a dark teal color. It features several large, semi-transparent circles of varying sizes. Overlaid on these circles and the background are numerous thin, light teal diagonal lines that create a sense of movement and depth.

Optics
Shinland

Each Ray is brighter in Shinland

SL-035A

Details

Material:	URC2500
Cover Material:	PC
Process:	Vaccum Aluminum Plating PC
MAX Diameter:	35.0mm
Height:	21.5mm
Matched Holder:	SL-HD-A
Matched Cover:	SL-035-CLEAR-LENS/SL-035-MIXING-LENS
ROSH Compliant:	YES
Status:	Ready

Optical Properties

Code	Typ. FWHM	Typ. Eff
SL-03515A	15°	90%
SL-03524A	24°	90%
SL-03536A	36°	90%

Photo



Matched LED Source

CLU700

BMC

CXM-6

CHM-6

CXM-7

CXA13

V6

C6

Solერიq S8

5258

G20

C1

LC010C


NJCxS024Z

NTCxS024B

Dimensional Figure

SL-035A


Measure Unit: mm

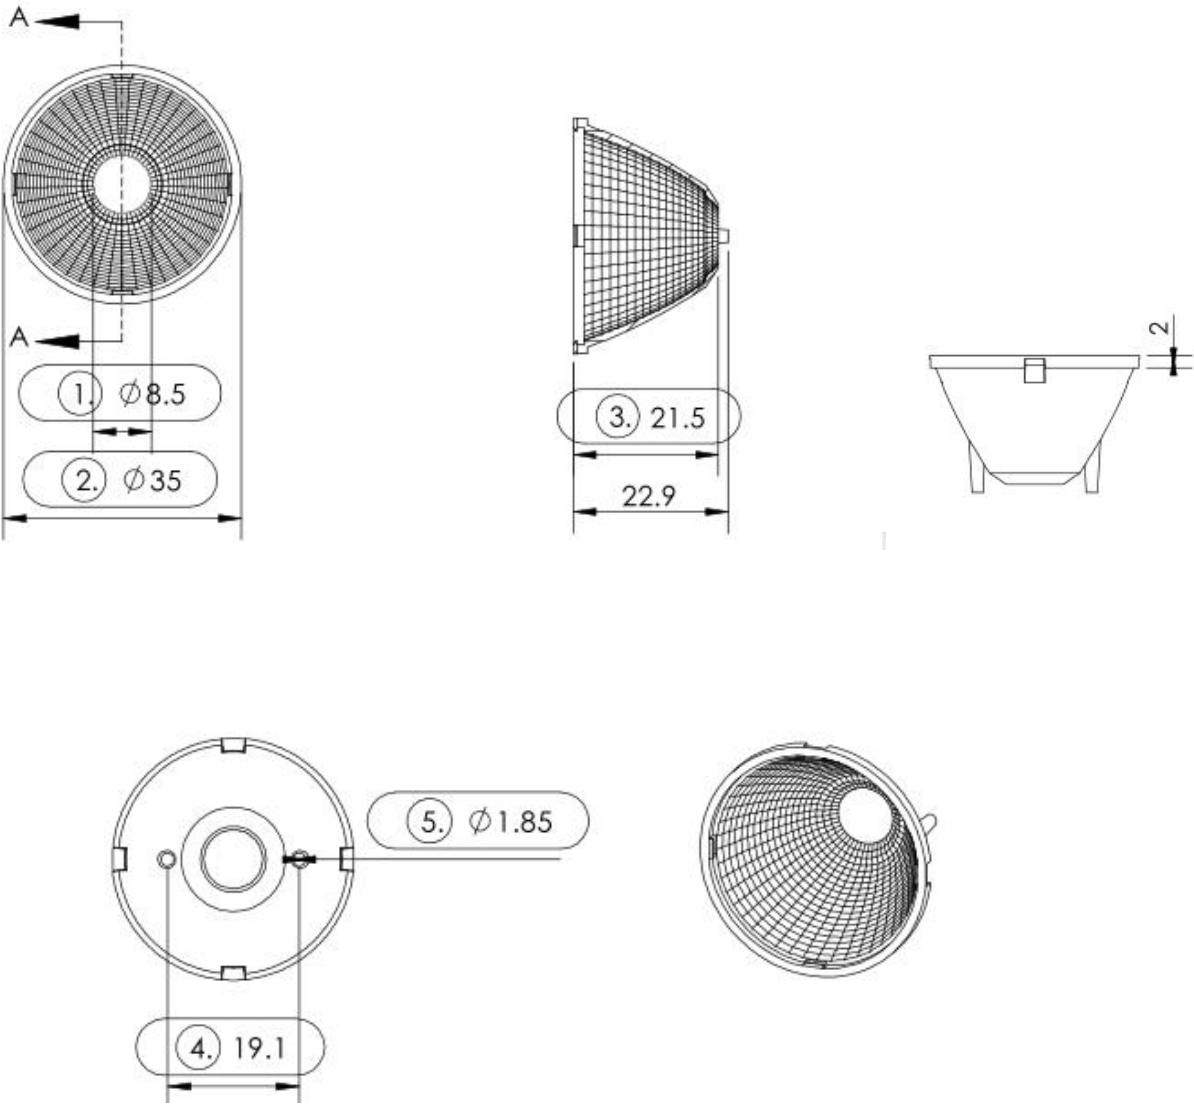

Dimensional Figure

SL-CXM-6-HD-A


Measure Unit: mm

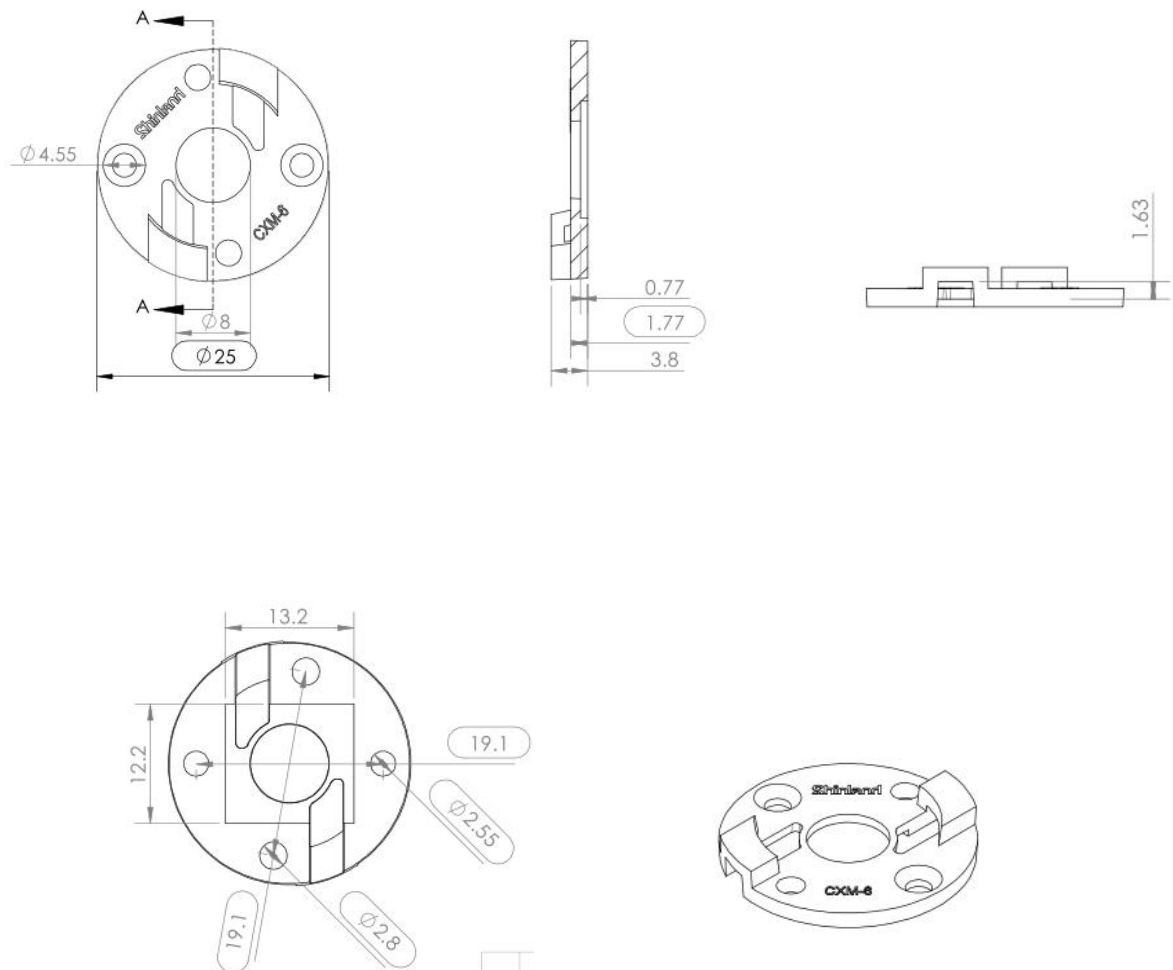

Dimensional Figure

SL-BRH-V8-HD-A



Measure Unit: mm

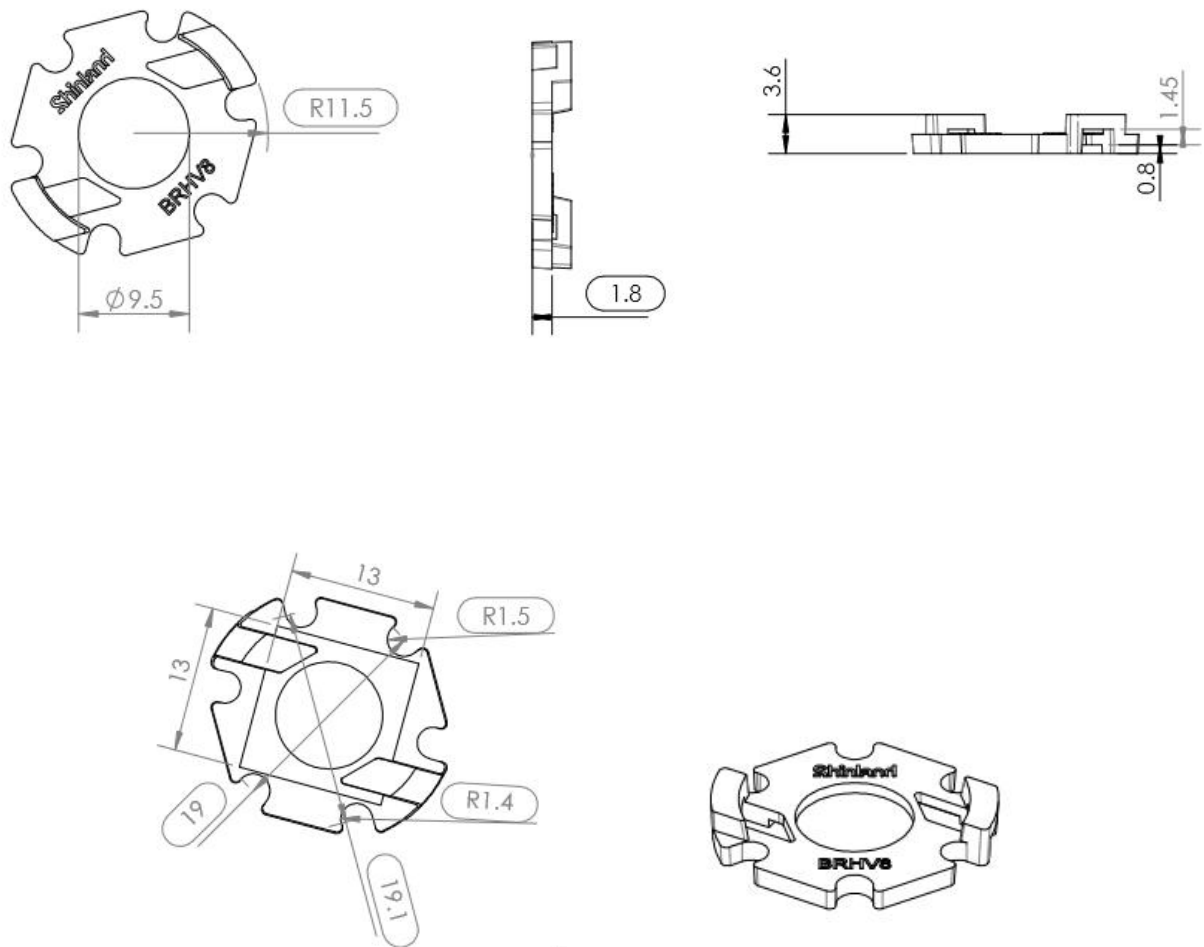

Dimensional Figure



SL-CXA1304-HD-A

Measure Unit: mm

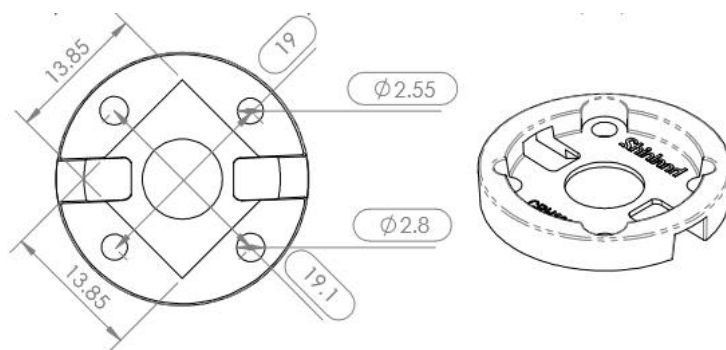
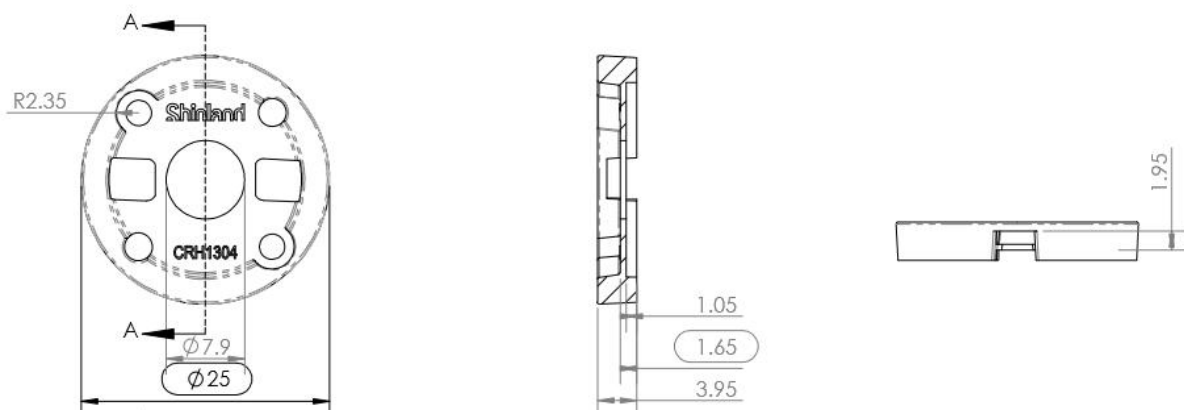


Distribution Curve Flux



SL-035A&SL-CXM-6-HD-A

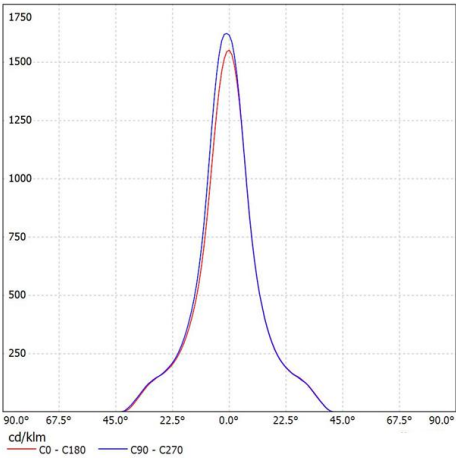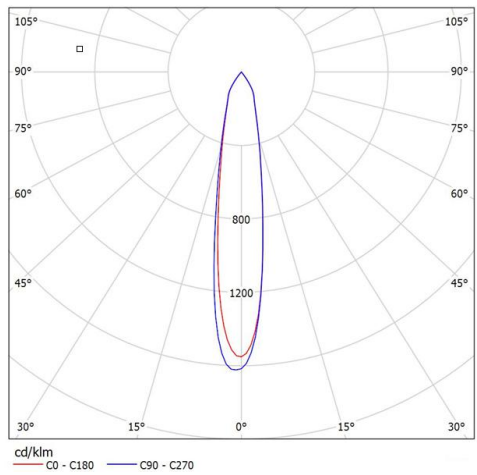

SL-03515A
K:4.79cd/lm,LED:CXM-6

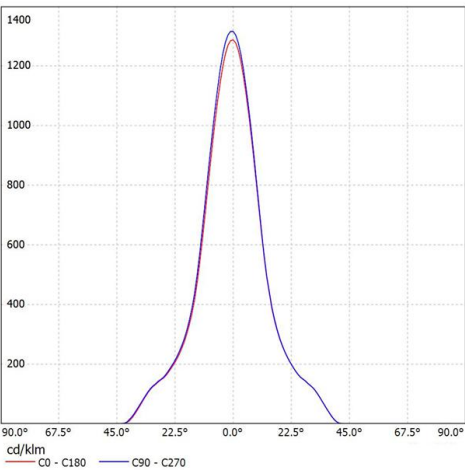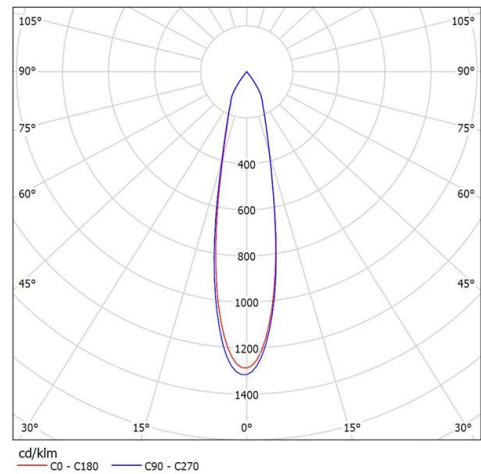



SL-03524A
K:3.88cd/lm,LED:CXM-6

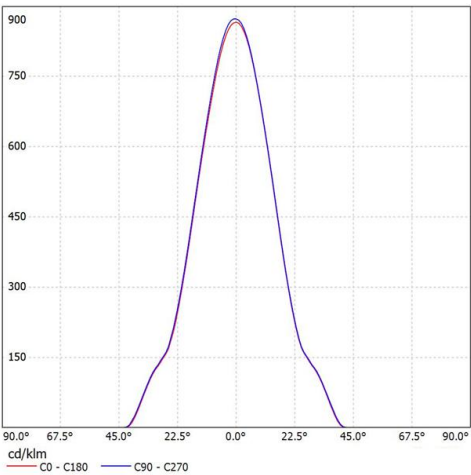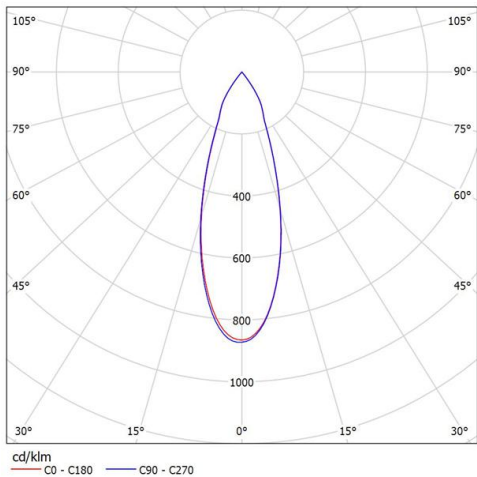



SL-03536A
K:2.55cd/lm,LED:CXM-6

Distribution Curve Flux



SL-035A&SL-BRH-V8-HD-A

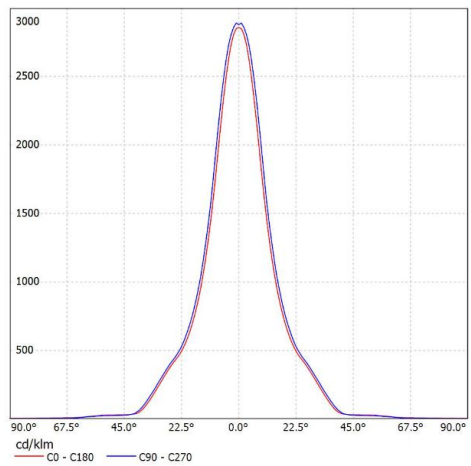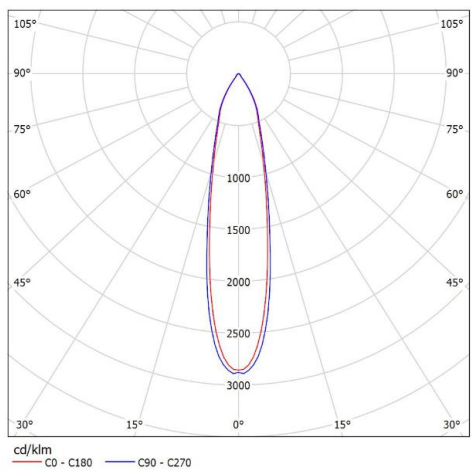

SL-03515A
K:3.50cd/lm,LED:V8

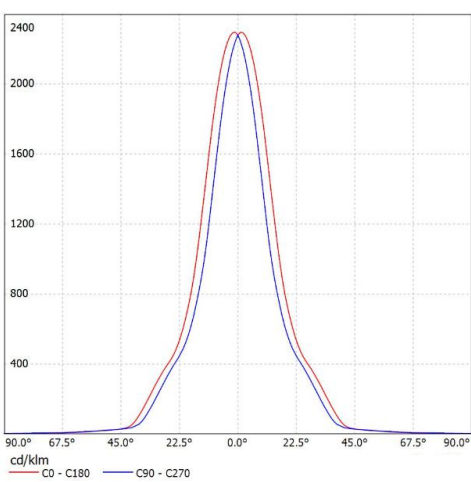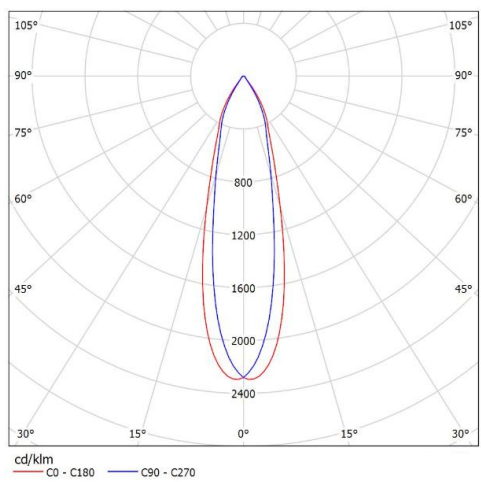



SL-03524A
K:2.87cd/lm,LED:V8

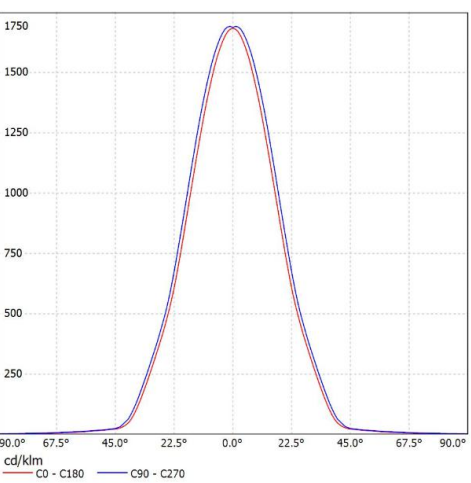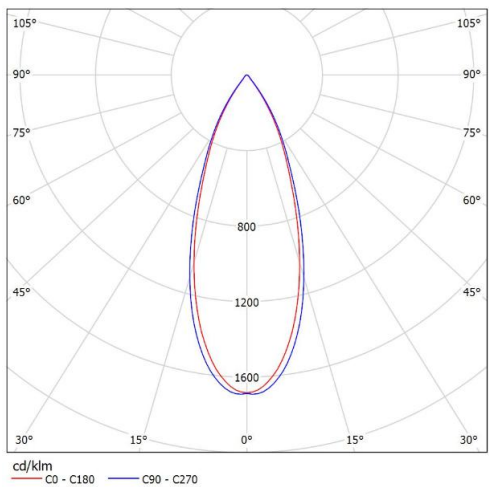



SL-03536A
K:2.06cd/lm,LED:V8

Distribution Curve Flux



SL-035A&SL-CXA1304-HD-A

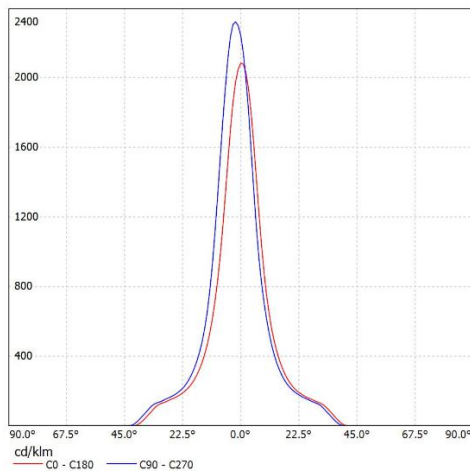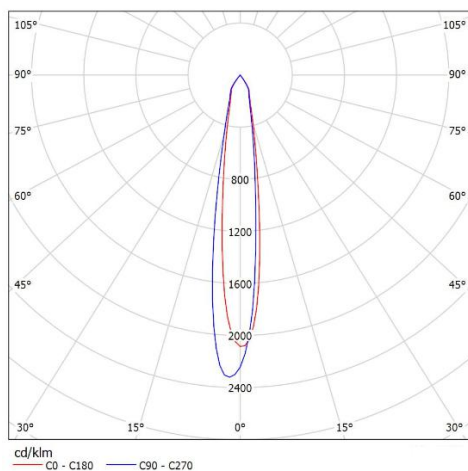

SL-03515A
K:6.30cd/lm,LED:CXA1304

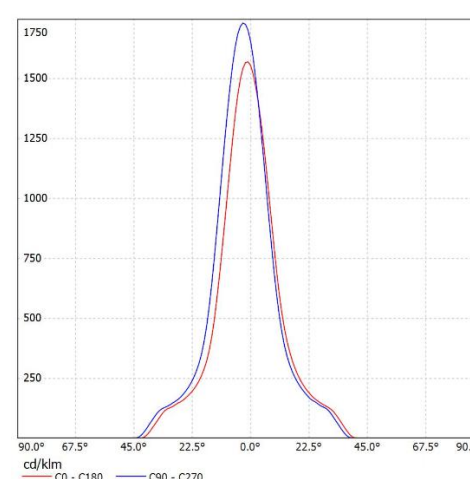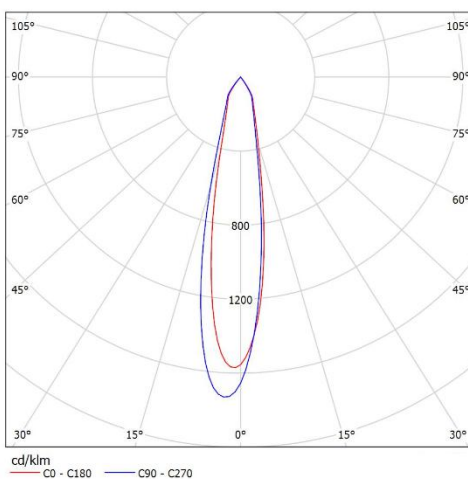

SL-03524A
K:4.70cd/lm,LED:CXA1304

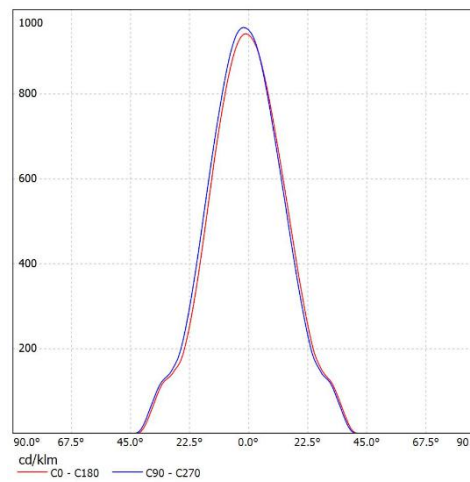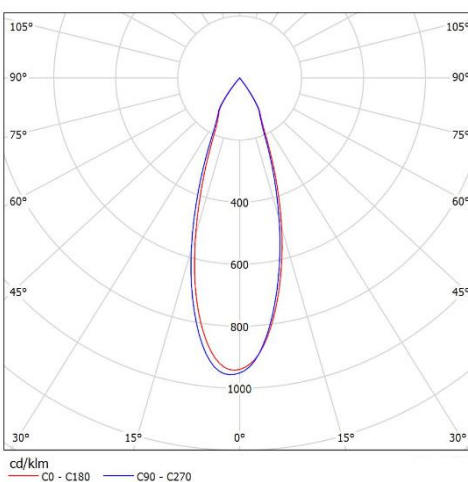

SL-03536A
K:2.57cd/lm,LED:CXA1304

Package Description

SL-035A

PART NO.	WITHOUT PC COVER		WITH PC COVER		BOX SIZE (cm)
	Number Per Box (pcs)	Box Weigh (kg)	Number Per Box (pcs)	Box Weigh (kg)	
SL-03515A	1008	4.03	936	5.08	55 X 32 X 32
SL-03524A	1008	3.93	936	4.93	55 X 32 X 32
SL-03536A	1008	4.00	936	5.05	55 X 32 X 32

Notes

- It is not allowed to scrub the reflective surface. If there is dust on the surface, please clean by soft cotton with little water.
 - It is forbidden to clean with industrial solvent such as ethanol.
 - Storage temperature: 0°C-40°C, and humidity:30%-95%
 - Keep reflectors in package to void the dust.
 - Prohibit the reflector touch with acid or alkaline solvent
-

About Shinland

Shenzhen Shinland Co. Ltd, one of the longest and most professional company in lighting optical field, have 20 years experience. Different from other factory which only have simple process, all aspects included R&D, making mold, injection molding, vacuum coating and market support are our company own vertically integrated production.

Insisting on 'Quality First, Service First' and pragmatic, enterprising spirit, building the market by quality, casting our brand by credibility and integrity, Shinland now become the leading supplier of lighting optical solution in China.